


# AD Series Automatic Dispenser

**Double Piston Pump**  
Simultaneous Dispensing



➡ Minimum shot: 1/768Y (0.039ml)

➡ Net efficiency: 200-480ml/min × 5

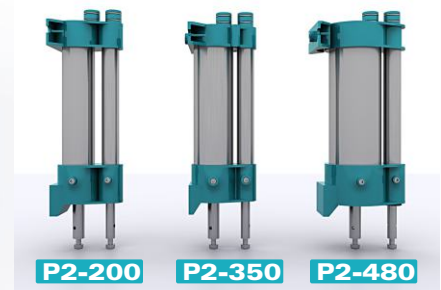

#### SANTINT · CHINA

Address: Xushui Industrial Trade  
Park, Zhengzhou.  
Tel: +86 371 6785 7168

#### SANTINT · POLAND

Address: ul. Postepu 19. mag.5  
02-676 Warszawa Polska  
Email: info@santint.com

#### SANTINT · U.S.A

Address: 2000 Bloomingdale Road, Suite  
220, Glendale Heights, IL 60139  
Tel: +1 847 350 6911

#### SANTINT · AUSTRALIA

Address: 2/4 Weddel Court  
Laverton North Victoria  
Email: info@santint.com

# AD Series Automatic Dispenser FEATURES >>>

**SANTINT**  
WHERE INNOVATION MEETS PRECISION



## 1 Double Pump Double Valve

Big pump brings high speed, and small pump ensures high accuracy. Double ceramic valves, robust and reliable.




## 2 Adjustable tube pressure sensor

No tube explosion, longer durability; Alarm when nozzles blocked.




## 3 Pump Selection System (PSS)

Optional for larger dispensing volume, extending life-span of the machine.




## 4 Recirculation

No sedimentation, drying or block in tubes, minimizing malfunction.



## 5 Water Circulation Humidifier

Minimizing nozzle blockage; rotary nozzle, easy to clean.



- Dispensing Type: Simultaneous
- Minimum Shot: 1/768Y(0.039ml)
- Net Efficiency: 200-480ml/minX5
- Canisters: Up to 32
- Canister Volume: 2.5/4.5/12L
- Canister Material: POM/Stainless Steel

- Flow Rate (Single Pump): 1200ml/min, 875ml/min, 500ml/min
- Efficiency (Single Pump): 480ml/min, 350ml/min, 200ml/min

- Dimension: 1284X865X1245 ( S )
- (WDXH) 1694X865X1245 ( M )
- (mm) 2072X865X1245 ( L )
- Power: 250W
- Power Supply: 220V/110V,50Hz/60Hz

**AD Series**  
Technical  
Parameters <<<