

AH1000

Automatic Dispenser



Net Efficiency : 1000ml/minX5

Minimum Shot : 1/1024Y (Yellow Oxide Included)

Durability : Yellow Oxide >10000L ; Others >20000L



SANTINT · CHINA

Address: Xushui Industrial Trade Park, Zhengzhou.
Tel: +86 371 6785 7168

SANTINT · POLAND

Address: ul. Postepu 19. mag.5
02-676 Warszawa Polska
Email: info@santint.com

SANTINT · U.S.A

Address: 2000 Bloomingdale Road, Suite 220, Glendale Heights, IL 60139
Tel: +1 847 350 6911


SANTINT · AUSTRALIA

Address: 2/4 Weddel Court
Laverton North Victoria
Email: info@santint.com

AH1000

Automatic Dispenser

FEATURES >>>

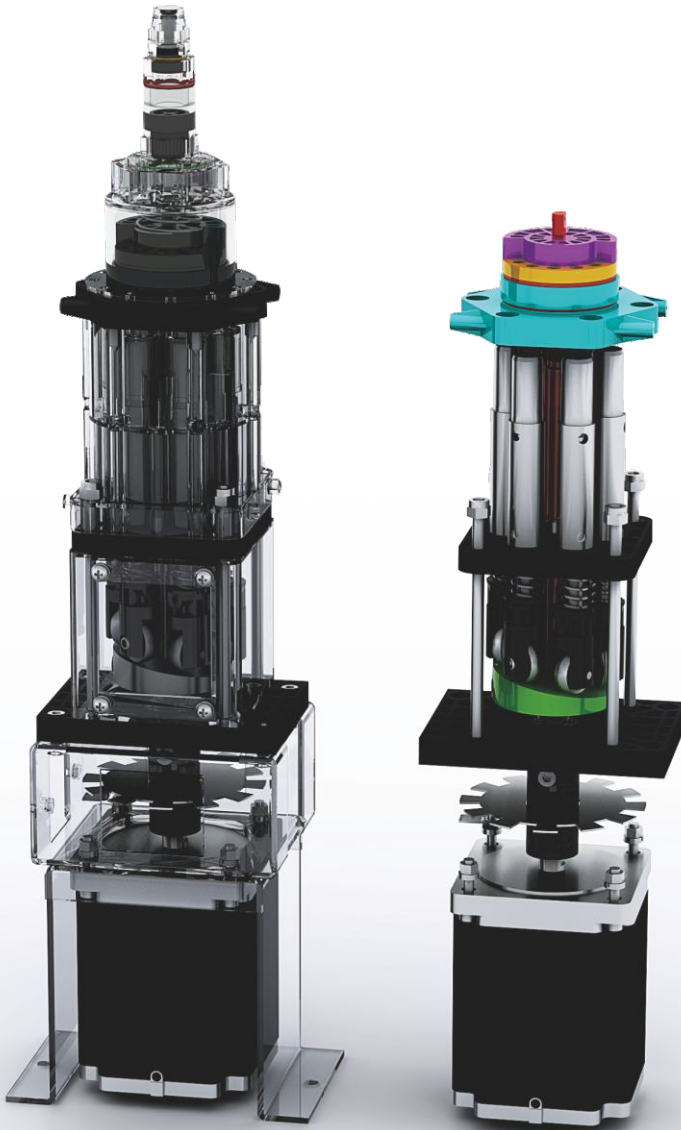

1

Self-calibration

P6 pump starts from zero position for each dispensing.




2

Blockage Warning No Tube Explosion



3


Recirculation



4

Rotary nozzle head


Humidifier with circulation water.



5

Three-Way Valve

Valve/Filter/Air
Exhauster



6

Multi-functional Roller Conveyor (Optional)



- Dispensing Type: Simultaneous
- Minimum Shot: 1/1024Y
- Net Efficiency: 1000ml/minX5

- NO. of Canisters: Up to 32
- Canister Size: 6L/12L/22L
- Canister Material: POM/Stainless Steel

- Can Table: Automatic
- Recirculation: Every 4 Hours
- Humidifier: Yes

- Stirring: 1 min/ h
- Stirring Speed: 20 rpm
- Laser Positioning: Yes

- Dimension: 1690X1210X1320(mm)
(WDXH)

- Power: 400W
- Power Supply: 220V/110V 50Hz/60Hz

AH1000
<<< Technical Parameters