SANTINT

HPA

Heated Mixing Machine

Convenient

Flexible

Series	Dimension	unit/20'	Number of big/small cans in each layer
HPA4	1000×630×2077 mm	44	
HPA6	1360×630×2077 mm	32	
HPA8	1720×630×2077 mm	32	
HPA10	2080×630×2077 mm	26	
HPA12	2440×630×2077 mm	26	
			

■ Stirring Time： 15 mins ■ Stirring Speed：72 rpm ■ Temperature： 16-25℃

Options： explosion-proof motor / vertical decoration board / working table / shelf

Paint can opens the sealing plate in operation, thus the heated air will pour into the sealing cover from the inlet.

The sealing plate is closed when the paint can is removed.

Height and width of layer are optional. Flexible configuration of big and small cans in each layer is available.

2 big cans = 3 small cans, this innovative design realizes the flexible change of paint position quantities.

Clear and simple installation manual

SANTINT

3 Installation Steps of HPA

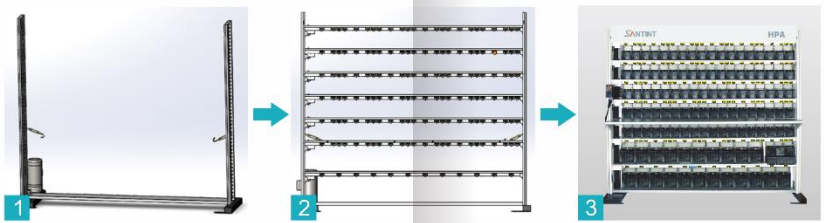

1. Main Frame → 2. Shelves → 3. Thermal Module

ADD: Xushui Industrial & Trading Park, Zhongyuan West Road, Zhengzhou City, Henan Province. PR. China. 450042 / TEL : (86) 371-67857168 / After-Service : (86) 371-67857319 / FAX : (86) 371-67857166
WEB : http://www.santint.com / E-mail:info@santint.com

Innovative Installation of Shelves

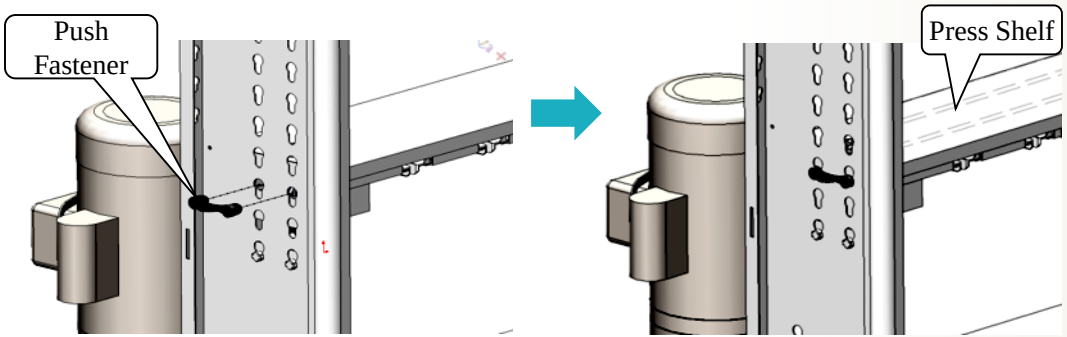

Push and Press

- One person, three steps, half an hour.

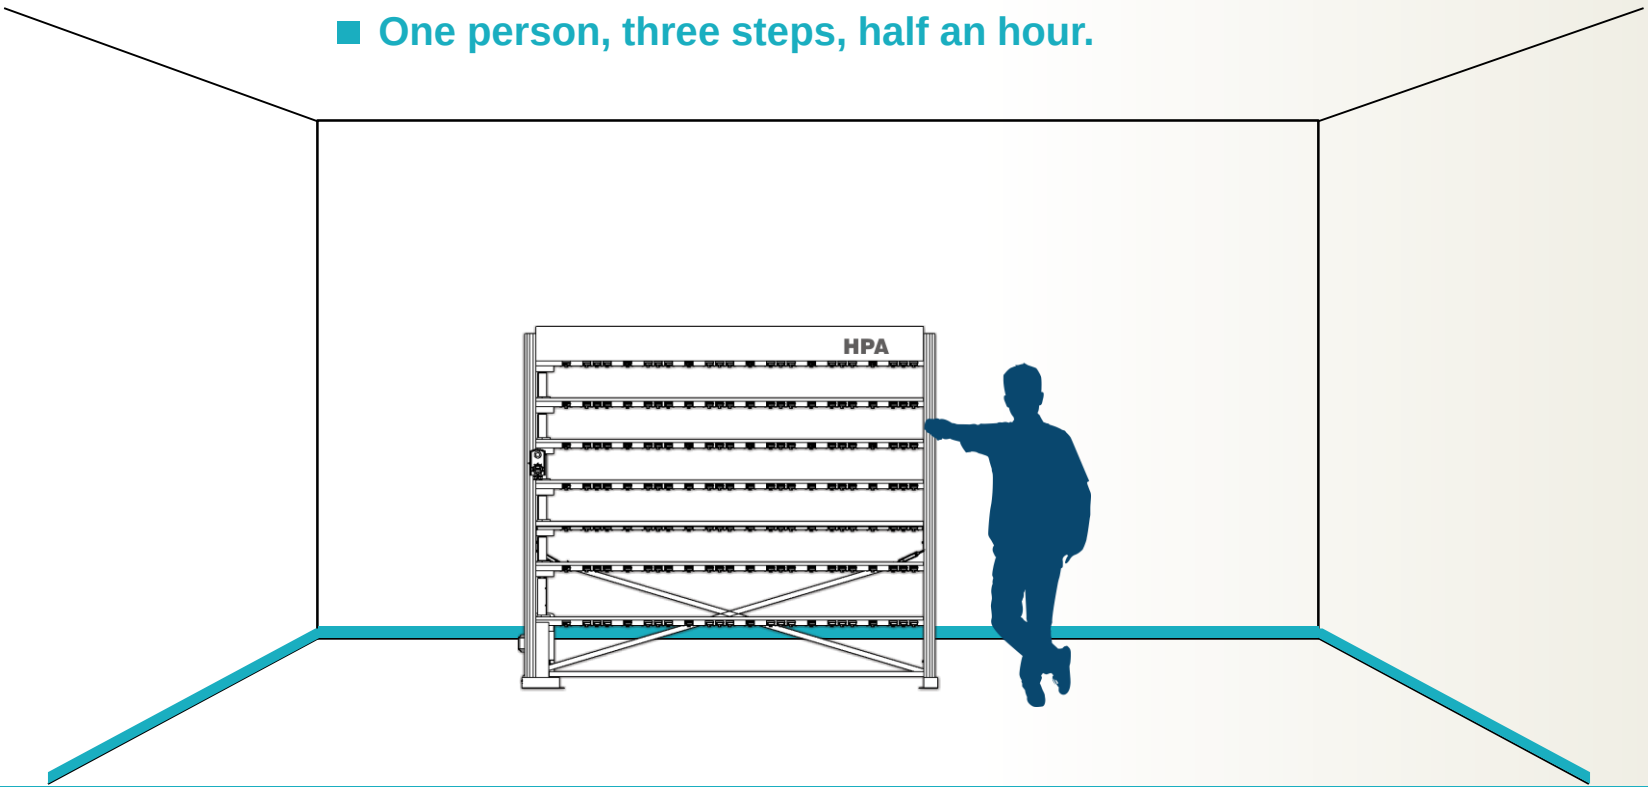

Overall Package

Pallet + Carton + Plastic Package makes the storage easy and transportation safe.

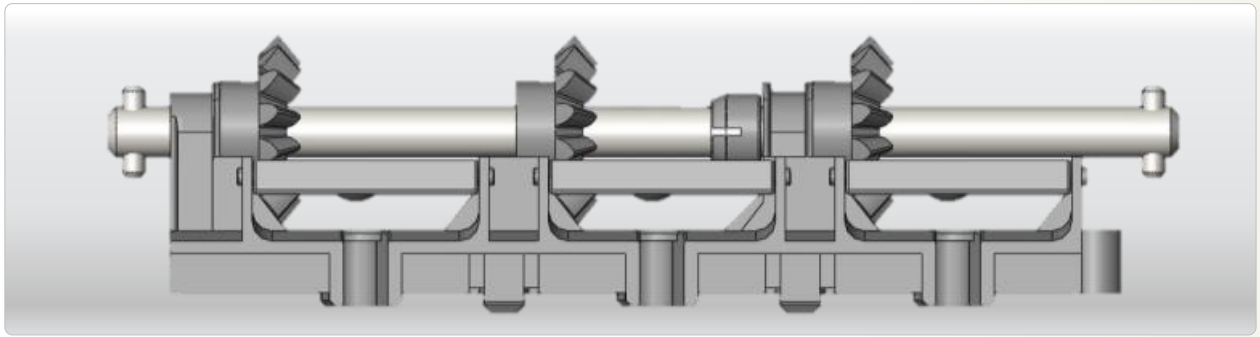

Gear-drive Module

Stable performance

Maintenance-free, low noise

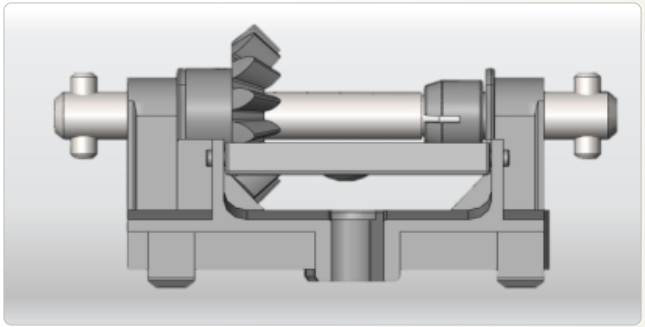

Self-adaptive Paddle Rod

HPA

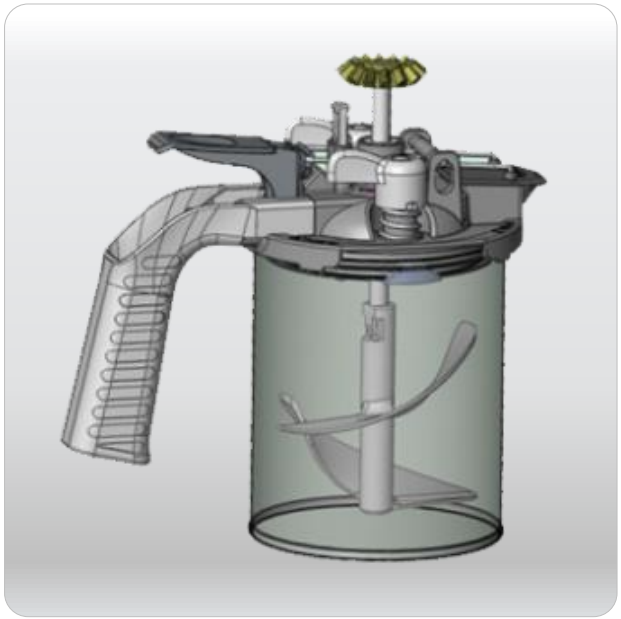

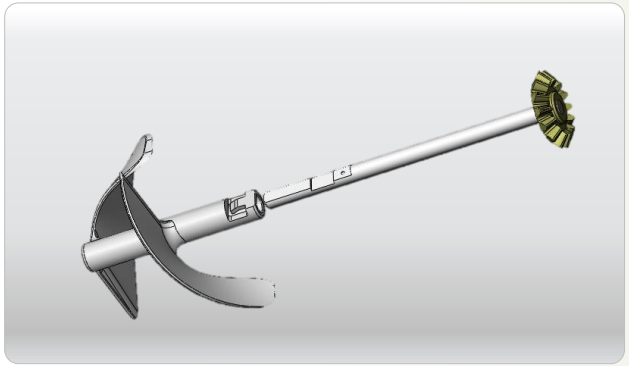

Easy to install, self-adaptive to the height of paint can. Simple and smart structure.

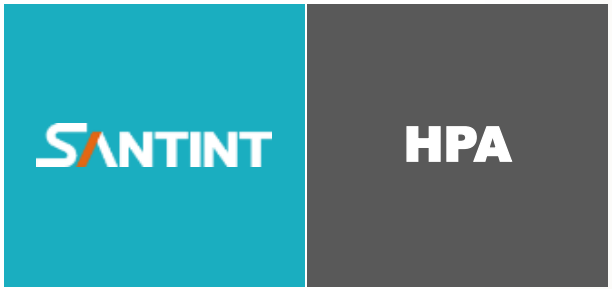

SANTINT · CHINA
Address: Xushui Industrial Trade Park, Zhengzhou.
Tel:+86 371 6785 7168

SANTINT · POLAND
Address: ul. Postepu 19. mag.5 02-676 Warszawa Polska
Email: info@santint.com

SANTINT · U.S.A
Address: 2000 Bloomingdale Road, Suite 220, Glendale Heights, IL 60139
Tel: +1 847 350 6911

SANTINT · AUSTRALIA
Address: 2/4 Weddel Court Laverton North Victoria
Email: info@santint.com