

A2 -100%

Automatic Dispenser



- ➡ 100% Recirculation
- ➡ Purge free
- ➡ Blockage free

SANTINT • CHINA

Add: Feilong Road, Xingyang,
Zhengzhou, China
Email: info@santint.com

SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG
Katwijk The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND

Add: ul. Postepu 19. mag.5
02-676 Warszawa Polska
Email: albert@santintpoland.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road,
Suite 220, Glendale Heights,
IL 60139, U.S.A
Email: info@santintusa.com

SANTINT • INDIA

Add: Building No.E3, 2/3, Hari
Hari Compound, Near Gajanan
Petrl Pump, Mankoli Nana,
Bhiwandi 421302 Thane India
Email: nick@santint.com

SANTINT • SOUTH AFRICA


Address: Hatfield Plaza, 1122
Burnett Street, Pretoria,
Gauteng, South Africa 0025
Email: edwin.Jiang@santint.com

A2-100% FEATURES >>>



1 100% Recirculation

Zero nozzle dryness/blockage;
purge-free;
maintenance-free;
colorant saving;
stable accuracy.

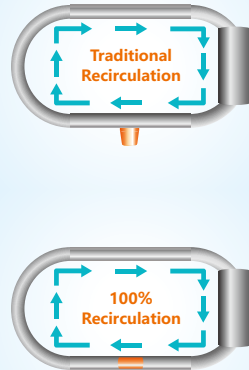

2 Box/Table Tinting

Saving PC cost;
pre-installed software,
shorter installation time.




3 Calibration-free Piston Pump



4 Piston Rod Detection

Warning when the piston is not pushed down.



P1 Piston Pump
Sequential Dispensing

■ Flow Rate 600ml/min
■ Efficiency 200ml/min

■ Minimum Shot
1/384Y(0.077ml)

■ Pump Capacity 60ml
■ Stirring Speed 20rpm

■ Canister Size 1.8L / 2.3L POM
2.3L / 3.8L Stainless Steel (Optional)
■ NO. of Canisters Up to 16

■ Max Can Size (D X H) 320X600mm
■ Machine Dimension (W X D X H) 707X848X1300mm
■ Packing Dimension (W X D X H) 830X990X1500mm
Loading Quantity 14 Pieces/20"Container

■ Net Weight 140Kg
■ Gross Weight 165Kg
■ Power ≤ 100W
■ Power Supply 220V/110V 50Hz/60Hz

A2 - 100%

Technical Parameters

